




GLOBE AIRMOTORS B.V.

GLOBE Airmotors | Boerhaaveweg 9-11 | NL - 2408 AD Alphen a/d Rijn | Tel +31 172 426 608 | info@globe-benelux.nl

Specifications: RM610

Piston Air Motor

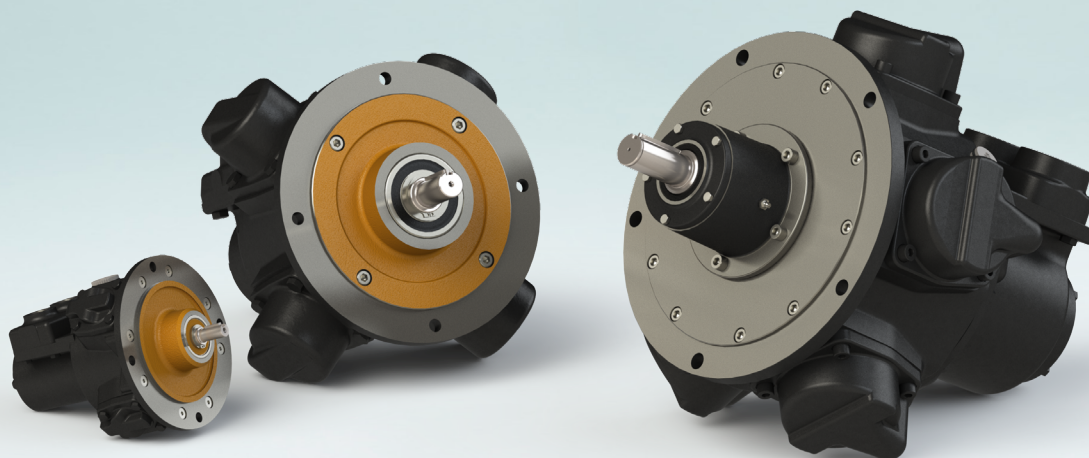





Contents

Dimensions & Spare Parts RM610	2
Dimensions & Performance RM610 + Brake	3
Dimensions RM610 + HCV/RCV	4
Dimensions & Performance RM610 + Brake + HCV/RCV	5
Spare Parts Brake, HCV, RCV	6-7




globe-airmotors.com

Dimensions RM610 & RM610 + Foot Bracket

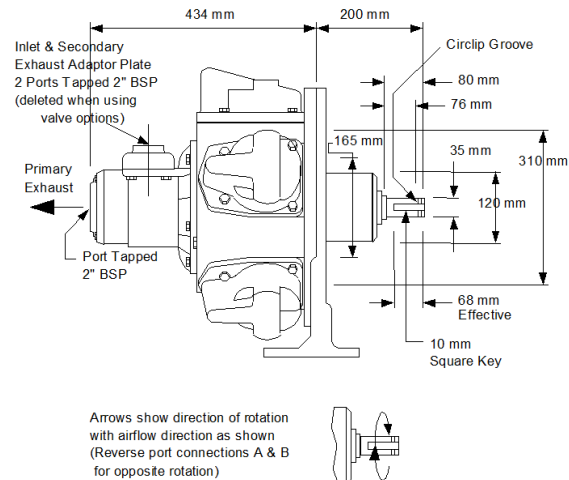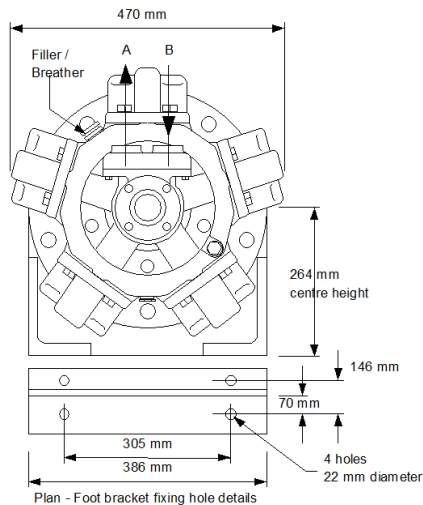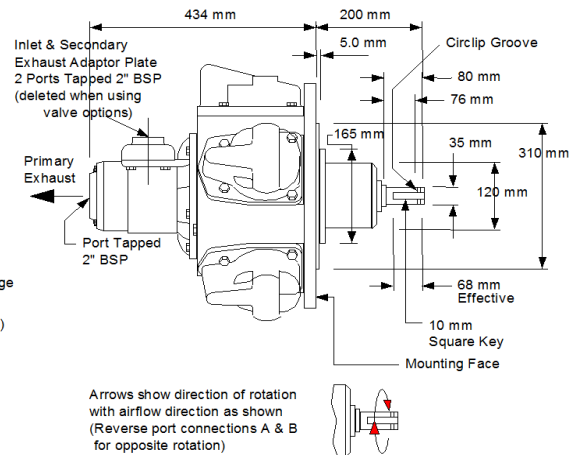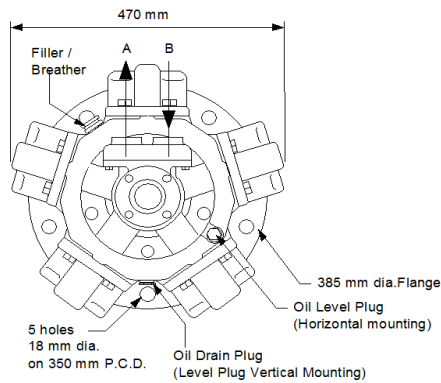


Spare Parts List RM610

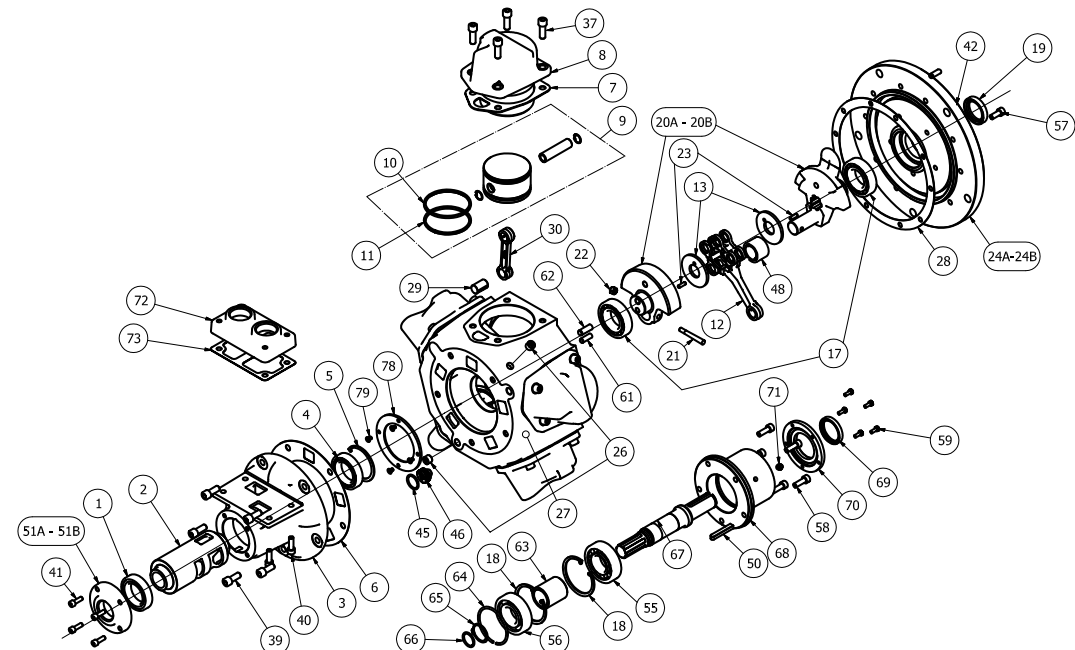

Item	Part No.	Description	Qty	Kit No.	Item	Part No.	Description	Qty	Kit No.
01	807-056	Rotary Valve Bearing (Outer)	1		45	808-004	Seal (transit only)	1	
02	620-006	Rotary Valve	1		46	130-066	Breather Plug	1	
03	620-011	Rotary Valve Housing	1		48	807-047	Needle Bearing	1	
04	807-055	Rotary Valve Bearing (Inner)	1		50	811-030	Key	1	
05	804-070	Rotary Valve Bearing Circlip	1		51A	620-042	Rotary Valve Exhaust Cover BSP	1	
06	620-001	Rotary Valve Housing Gasket	1*	629-912	51B	620-042N	Rotary Valve Exhaust Cover NPT	1	
07	510-030	Cylinder Gasket	5*	629-912	55	807-063	Output Shaft Brg. (Outer)	1	
08	510-082	Cylinder	5		56	807-012	Output Shaft Brg. (Inner)	1	
09	520-902A	Piston Assembly	5*	629-912	57	809-001	Flange Flange Cap Screws	10	
10	520-024	Oil Control Ring	5*	629-912	58	809-002	Output Housing Bolts	5	
11	520-022	King Rod	1		59	802-016	Output Housing Cover Bolts	5	
12	520-077	Crank Pin Spacer	2		61	806-001	Drive Pin (dia. 10mm)	1	
13	520-052	Crankshaft Bearing	2		62	806-002	Drive Pin (dia. 12mm)	1	
17	807-062	Crankshaft Bearing Circlip	2		63	518-001	Output Shaft Bearing Spacer	1	
18	804-068	Crankshaft Oilseal	1*	629-912	64	518-004	Output Shaft Spring Ring	1	
19	808-047	Std. Crankshaft Assembly	1		65	804-017	Output Shaft Circlip	1	
20A	520-901	SAE Crankshaft Assembly	1		66	808-002	Output Shaft Seal	1*	629-912
20B	520-904	Crank Bolt	1		67	518-003	Output Shaft	1	
21	510-088	Crank Nut	1		68	518-005	Output Shaft Housing	1*	629-912
22	801-009	Spring Dowel	1		69	808-042	Output Shaft Oil Seal	1	
23	806-013	Std. Flange Plate	1		70	518-002	Output Shaft Housing Cover	1	
24A	520-076	SAE Flange Plate	1		71	816-015	Output Shaft Grease Nipple	1	
24B	520-113	Plug	1		72A	620-046	Inlet Adaptor Plate BSP	1	
26	816-071	Engine Case	1		72B	620-046N	Inlet Adaptor Plate NPT	1	
27	620-012	Engine Case Gasket (520)	1		73	620-047	Inlet Adaptor Plate Gasket	1*	629-912
28	510-090	Queen Rod Pivot	5	629-912	78	620-045	Bearing Cap	1	
29	520-081	Queen Rod	1*		79	810-016	Bearing Cap C'sk Screw	4	
30	520-078	Cylinder Bolts	5			149-920	Conversion Kit	1	
37	809-035	Valve Housing Bolts	20			629-912	RM610 Seal Kit	1	
39	802-054	Adaptor Plate Bolt	4						
40	802-054	Exhaust Cover Bolts	4						
41	802-033	Flange Flange Plugs	2						
42	815-008		5*						


Dimensions & Performance RM610 + Brake

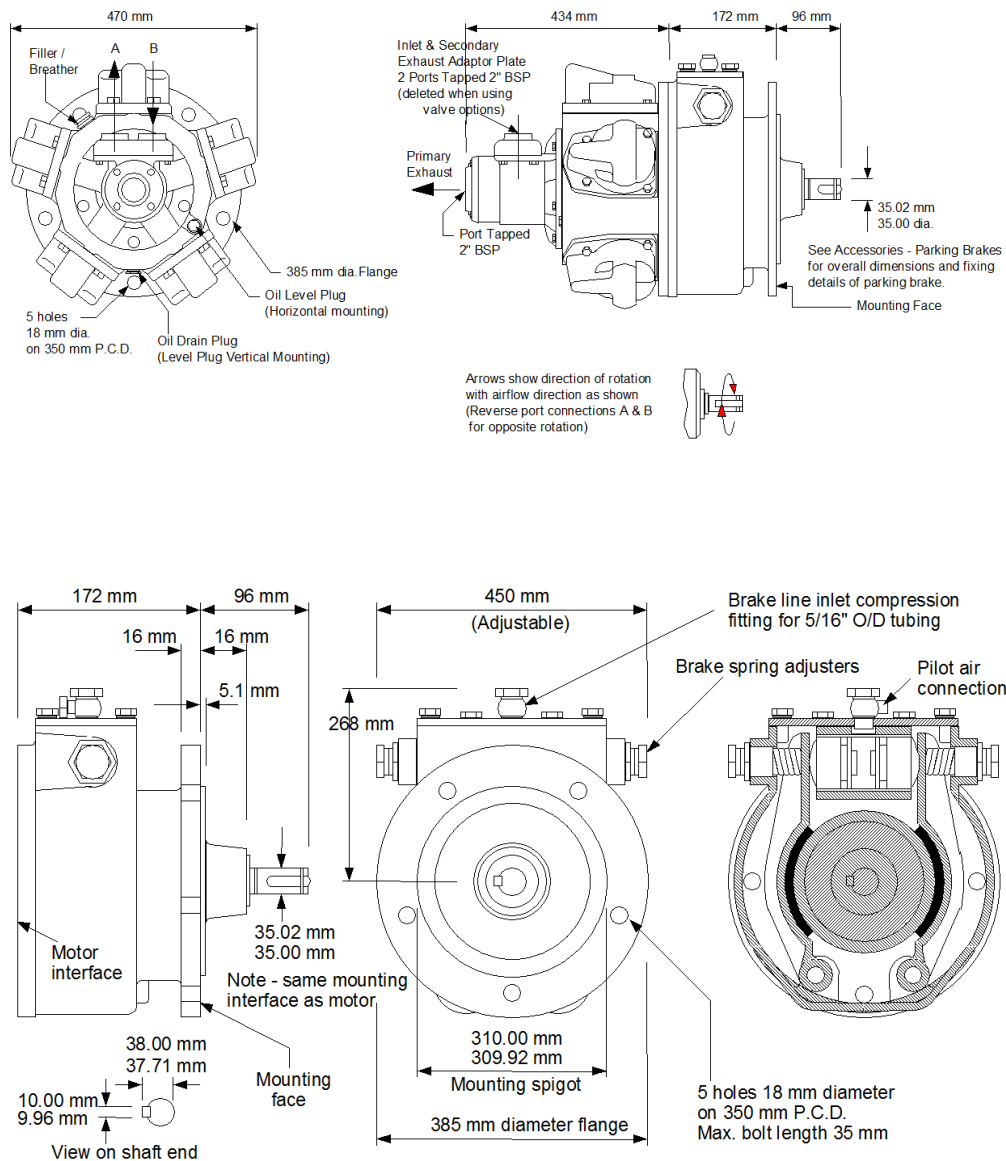


Gearbox ratio: None

Maximum speed: 2000 RPM
No Control Valve fitted


GRAPH 1 TORQUE - SPEED

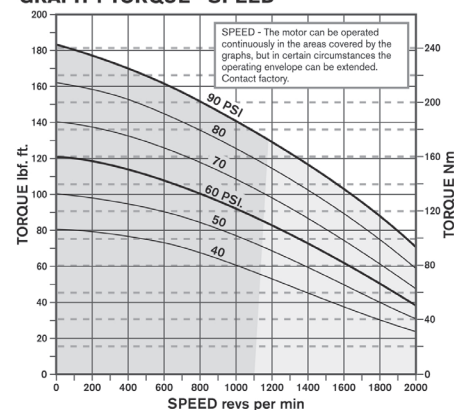


GRAPH 2 STARTING TORQUE - PRESSURE

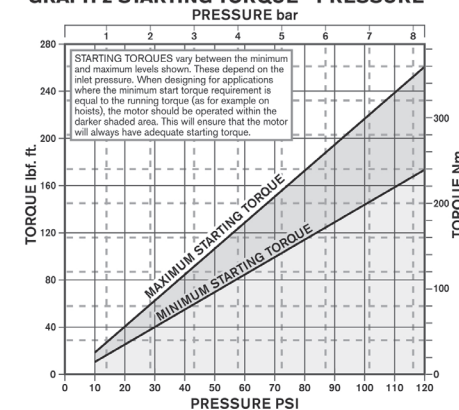

GRAPH 3 POWER - SPEED

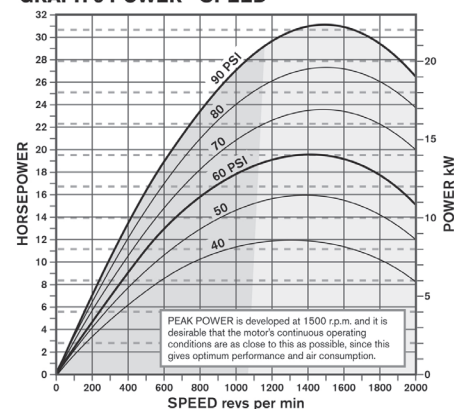

GRAPH 4 CONSUMPTION - SPEED

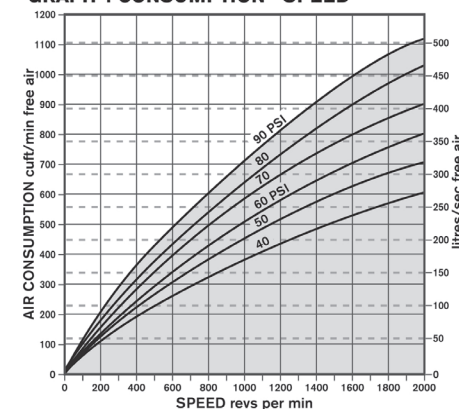

LUBRICATING OIL CAPACITIES

Horizontal 1,1 litres Vertical 2,1 litres

Use a good quality hydraulic oil with a viscosity of around 100cSt (460SSU) at 40°C (104°F)

AIRLINE FILTRATION AND LUBRICATION

Use 64 micron filtration or better. Choose a lubricator suitable for the flow required. Prior to initial start-up, inject oil into the inlet port.

GENERAL DATA

MASS (motor only) 125 kgs (276 lbs)

MOMENT OF INERTIA of rotating parts 14 gm² (motor only)


MAX OVERHUNG FORCE on motor shaft 6500 N (1460 lbf)

TEMPERATURE RANGE -20°C to +60°C (-4°F to +140°F) / -10°C to +60°C (-14°F to +140°F) with brake

Lubricator drop rate 8-10 drops/minute continuous operation

Lubricator drop rate 16-20 drops/minute intermittent operation

Dimensions & Performance RM610 + HCV

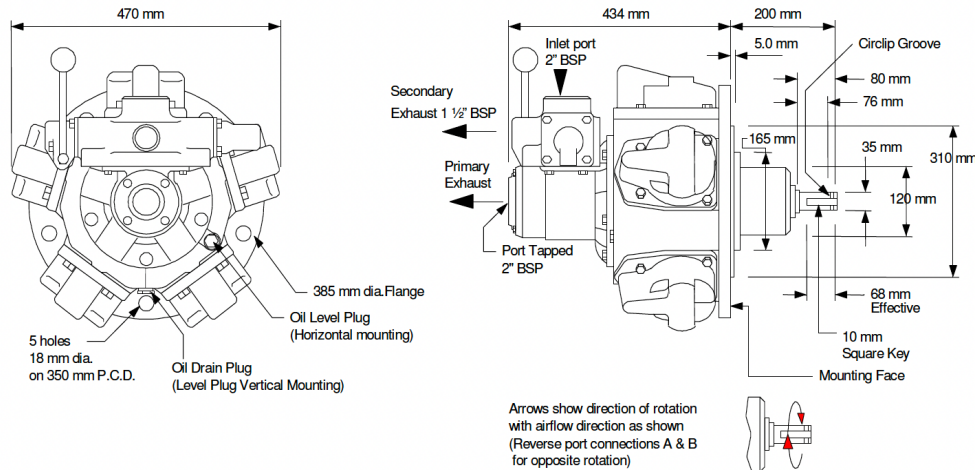

Operational principle RM610 Control Valve Options

This range of bolt on valves offers very sensitive speed and directional control. One frictional matched spool and sleeve assembly is offered with two alternative means of actuation.

Configuration


As standard these valves can be supplied with either **EQUAL POWER OR BIASED POWER** spools, the latter is suitable for hoisting applications (normal power for lifting - reduced power for lowering). The direction of reduced power must be stated when ordering **CW** or **CCW**, when viewed on the output shaft of the motor.

Hand Controlled (HCV) - The control valve spool is operated directly by a lever mechanism. Speed increase is obtained as the lever is moved in either direction from the centre (neutral) position.


Remotely Controlled (RCV) - This option is usually controlled from a remote position by one of the PC series or LC2 remote controllers. A variable air pilot signal is applied to either end of the valve spool, depending on the required direction of motor rotation. The pilot pressure range is between 1.4 bar (20 psi) and 4.8 bar (70 psi), increased pilot pressure gives increased speed. The valve is spring centred to neutral.

Pressure Drop - Minimal pressure drop will be experienced through the valves, having the effect of maintaining the output torque whilst reducing the motor output speed by approximately 10-15% at 6 bar (90 psi) at maximum power. The starting torque remains unaffected.


Dimensions & Performance RM610 + RCV

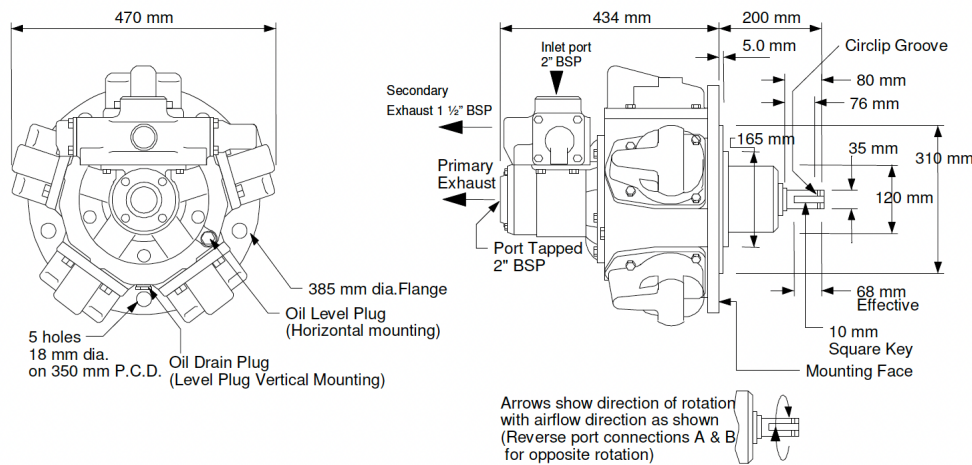


HAND CONTROL VALVE

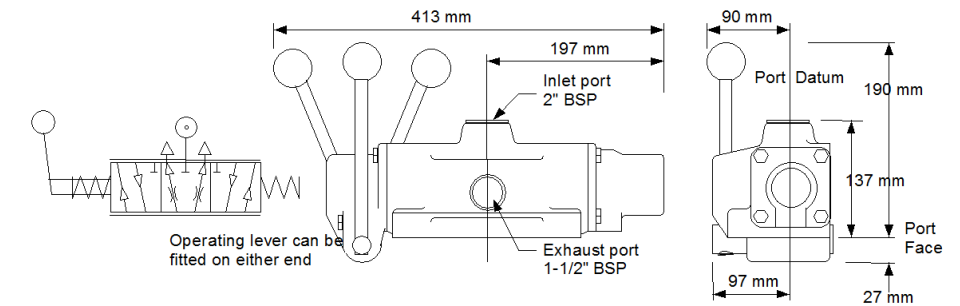

REMOTE CONTROL VALVE




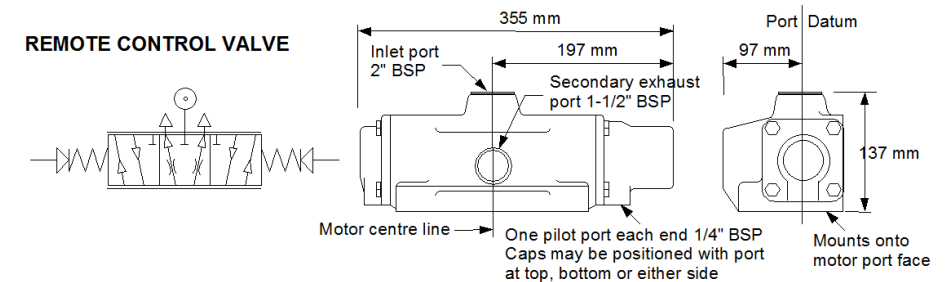


Dimensions & Performance RM610 + Brake + HCV

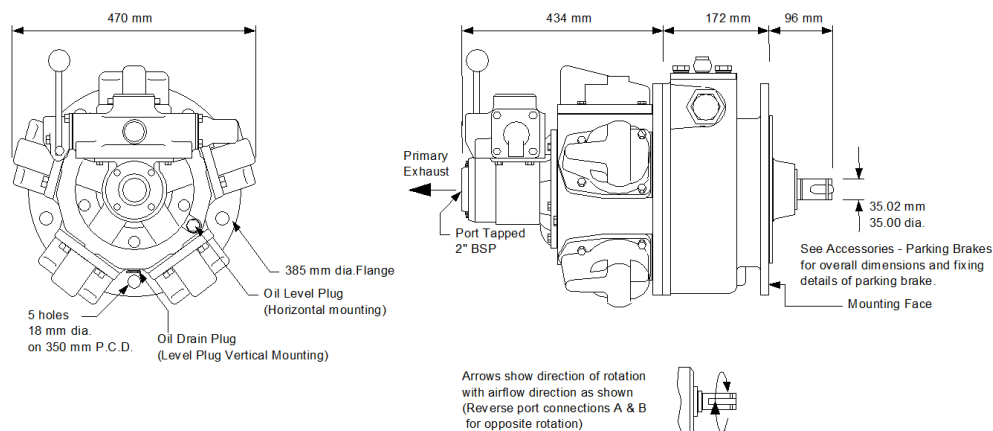


Gearbox ratio: None

Maximum speed: 1800 RPM
Control Valve Fitted

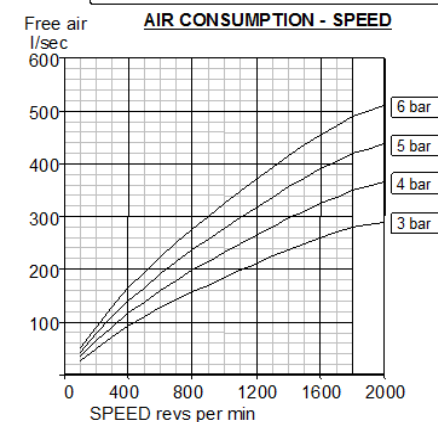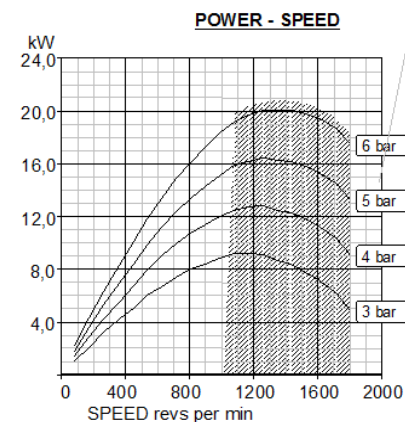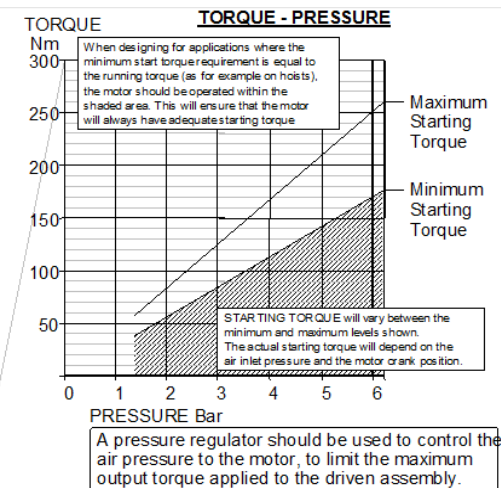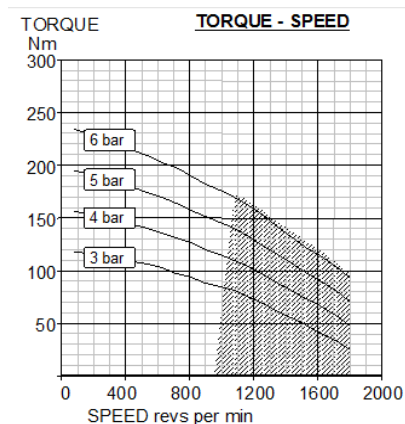

Dimensions & Performance RM610 + Brake + RCV

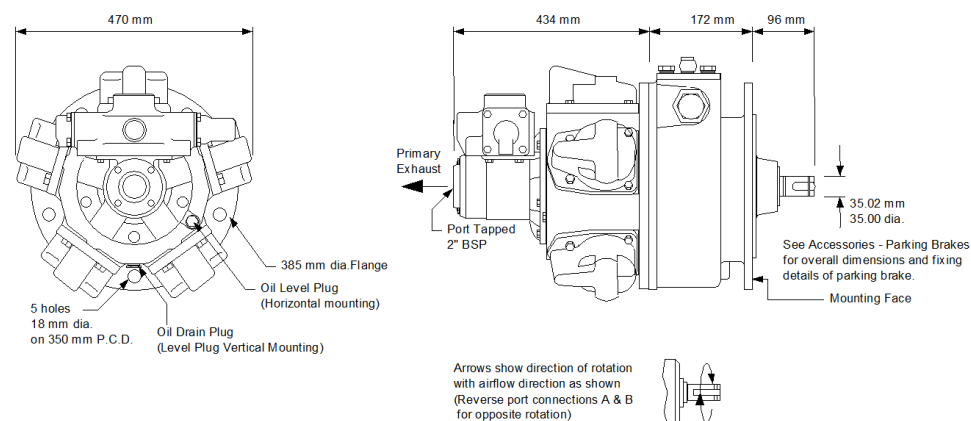

LUBRICATING OIL CAPACITIES

Horizontal 1,1 litres Vertical 2,1 litres

Use a good quality hydraulic oil with a viscosity of around 100cSt (460SSU) at 40°C (104°F)

AIRLINE FILTRATION AND LUBRICATION

Use 64 micron filtration or better. Choose a lubricator suitable for the flow required. Prior to initial start-up, inject oil into the inlet port.

GENERAL DATA

MASS (motor only) 125 kgs (276 lbs)

MOMENT OF INERTIA of rotating parts 14 gm² (motor only)


MAX OVERHUNG FORCE on motor shaft 6500 N (1460 lbf)

TEMPERATURE RANGE -20°C to +60°C (-4°F to +140°F)
/ -10°C to +60°C (-14°F to +140°F) with brake

Lubricator drop rate 8-10 drops/minute continuous operation


Lubricator drop rate 16-20 drops/minute intermittent operation

Spare Parts List Parking Brake

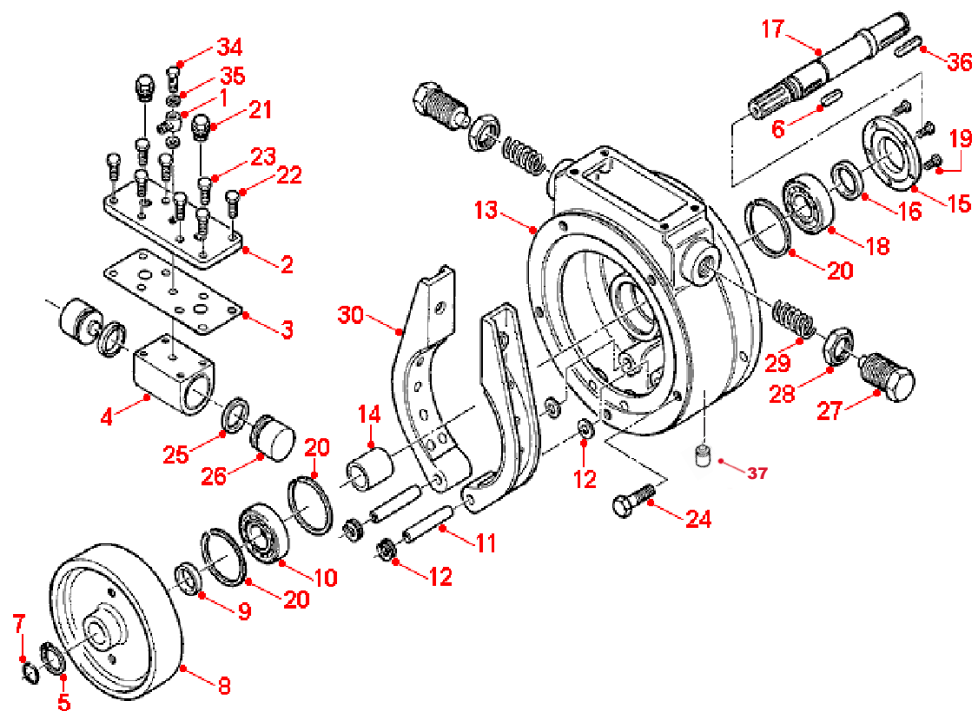


Item	Part No.	Description	Qty
01	816-005	Banjo Bolt C/W/ Nut&Rin 5/16	1
02	512-013	Plunger Plate	1
03	512-030	Gasket Plunger Block	1
04	512-021	Plunger Block	1
05	804-017	Circlip 40mm External	2
06	811-006	Key K.130	1
07	808-002	O Ring-1/8"x1-3/8"	1
08	512-001	Brake Wheel	1
09	512-036	Wheel Spacer	1
10	807-013	Bearing 6308 2RS	1
11	412-003	Pin	2
12	803-003	Washer M. 16	6
13	512-008	Brake Housing	1
14	518-001	Output Brg Spacer	1
15	518-002	Output Bearing Housing Cap	1
16	808-042	Oilseal 48x62x8/R4	1
17	512-005	Brake Shaft	1
18	807-063	Roller Bearing	1
19	802-016	Hex Head Screw M6 x 16	5
20	804-068	Circlip 90mm External	3
21	816-265	Screw Plugs (Blueamay)	2
22	802-053	Set Screw M10 x 25	4
23	802-052	Set Screw M10 x 20	4
24	802-094	Bolt M16 x 40 Hex Head	5
25	808-071	U Packing U132	2
26	512-011	Plunger	2
27	512-009	Adjuster Screw	2
28	512-024	Locknut	2
29	814-011	Spring MSD15	2
30	512-901	Brake Shoe Assy	2
31	816-006	Banjo Bolt 1/4" BSP	1
32	808-090	Bonded Seal 1/4"BSP Dowty	2
33	811-030	Key 10 x 8 x 63	1
34	7008G18	Breather plug 1/8 BSPP (ATEX only)	1

Spare Parts List Hand Control Valve

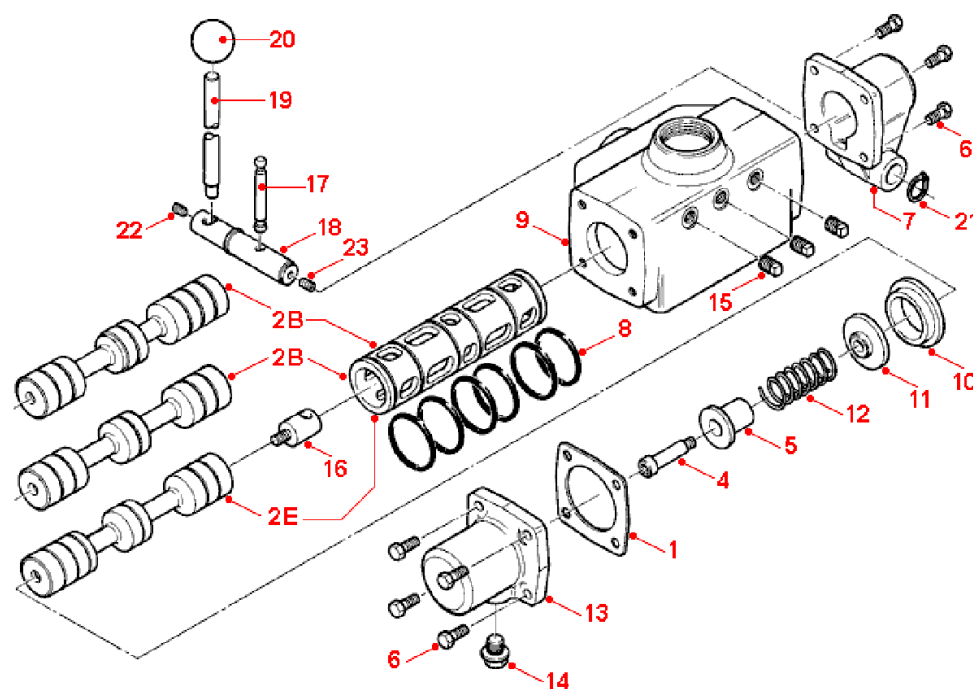

Item	Part No.	Description	Qty
01	521-066	End Cap Gasket	2
02E	521-913	Matched Spool and Sleeve	1 (Equipower)
02B	521-914	Matched Spool and Sleeve	1 (Biased)
4	817-002	Shoulder Screw 10 mm	1
5	521-071	Centering Shaft Guide	1
6	802-033	Set Screw M8 x 25	8
7	523-041	Lever Cap	1
8	808-013	O Ring 2" x 1/8"	6
9	521-060	Valve Body	1
10	521-068	Valve Sleeve Spacer	1
11	521-072	Washer, Spring Centering	1
12	814-020	Spring Flexo 403824	1
13	521-064	End Cap - Spring End	1
14	113-050	Vent Plug	1
15	816-061	Plug 1/4" BSPT Sq. Head	3
16	523-024	Toggle Shaft	1
17	523-026	Toggle Pin	1
18	523-008	Hand Lever Pivot	1
19	313-002	Hand Lever	1
20	818-002	Black Plastic Knob 1-1/2"	1
21	804-013	Circlip 20mm External	2
22	815-010	Grub Screw M8 x 10	1
23	815-002	Grub Screw M8 x 16	1

Spare Parts List Remote Control Valve

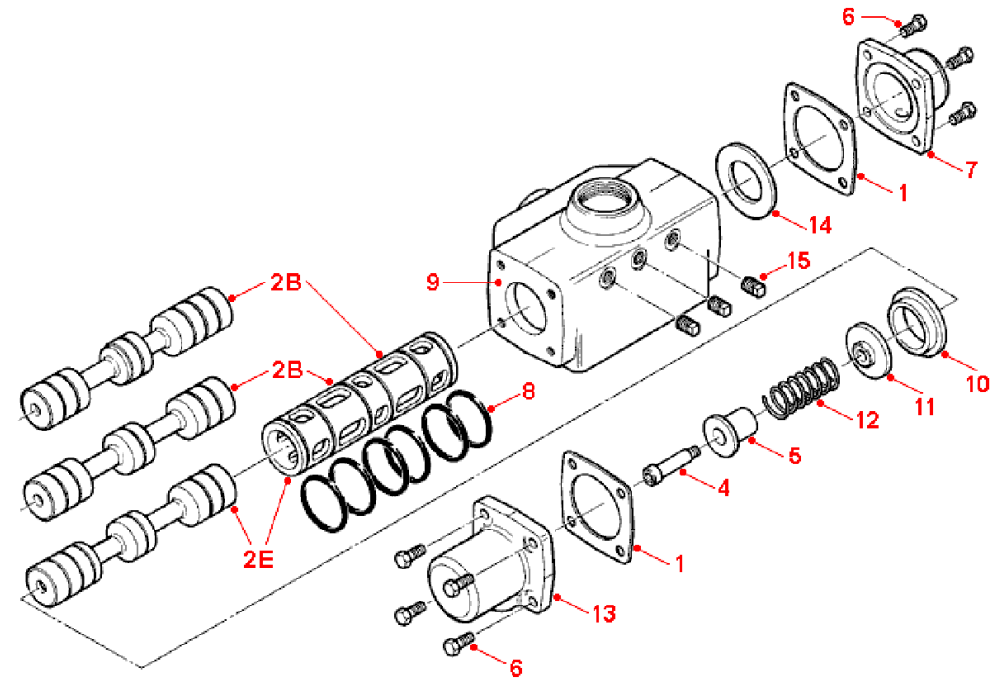

Item	Part No.	Description	Qty
01	521-066	End Cap Gasket	2
02E	521-913	Matched Spool and Sleeve	1
02B	521-914	Matched Spool and Sleeve	1
4	817-002	Shoulder Screw 10 mm	1
5	521-071	Centering Shaft Guide	1
6	802-033	Hex Head Screw M8 x 25	8
7	521-065	End Cap - Plain End	1
8	808-013	O Ring 2"x2-1/8"	6
9	521-060	Valve Body	1
10	521-068	Valve Sleeve Spacer	1
11	521-072	Washer, Spring Centering	1
12	814-019	Sprin, Control Spool	1
13	521-064	End Cap - Spring End	1
14	521-033	End Cap Washer	1
15	816-074	Plug 1/8" BSPT Sq. Head	3

Ordering code

Select easily with the ordering code your version and order it at our sales team. Do you have special wishes? For example ATEX Certified, different mountings, brakes etc. You name it and we make it possible. Contact us for your wishes and we will be happy to engineer a proposal to suit your requirements.

